



Śruby z łbem walcowym z gniazdem sześciokątnym

Hexagon socket head cap screws
 Zylinderschrauben mit Innensechskant
 ISO 4762
 PN/M 82302

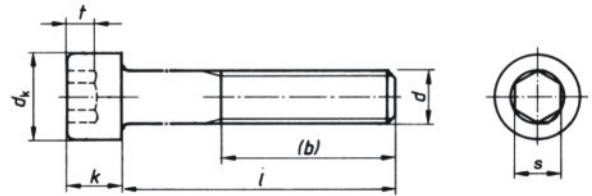

| d | M 1,6 | M 2 | M 2,5 | M 3 | M 4 | M 5 | M 6 | M 8 | M 10 | M 12 |
|--------------------|-------|-----|-------|-------|-------|-------|-------|--------|--------|-------|
| / w m m | | | | | | | | | | |
| 3 | + | + | | | | | | | | |
| 4 | + | + | + | + | | | | | | |
| 5 | + | + | + | + | + | | | | | |
| 6 | + | + | + | + | + | + | + | | | |
| 8 | + | + | + | + | + | + | + | | | |
| 10 | | + | + | + | + | + | + | + | | |
| 12 | | + | + | + | + | + | + | + | + | |
| 14 | | + | + | + | + | + | + | + | | |
| 16 | | + | + | + | + | + | + | + | + | + |
| 18 | | + | + | + | + | + | + | + | + | |
| 20 | | + | + | + | + | + | + | + | + | + |
| 22 | | | | + | + | + | + | + | + | |
| 25 | | | | + | + | + | + | + | + | + |
| 30 | | | | + | + | + | + | + | + | + |
| 30/30 | | | | | | + | | | | |
| 35 | | | | + | + | + | + | + | + | + |
| 35/35 | | | | | | + | + | | | |
| 40 | | | | + | + | + | + | + | + | + |
| 40/40 | | | | | | + | + | + | | |
| 45 | | | | + | + | + | + | + | + | + |
| 45/45 | | | | | | + | + | + | + | |
| 50 | | | | + | + | + | + | + | + | + |
| 50/50 | | | | | | + | + | + | + | |
| 55 | | | | | + | + | + | + | + | + |
| 55/55 | | | | | | | | + | + | |
| 60 | | | | + | + | + | + | + | + | + |
| 60/60 | | | | | | + | + | + | + | |
| 65 | | | | | | + | + | + | + | + |
| 70 | | | | + | + | + | + | + | + | + |
| 70/70 | | | | | | | + | + | + | |
| 75 | | | | | | + | + | + | + | + |
| 80 | | | | | + | + | + | + | + | + |
| 80/80 | | | | | | | + | + | + | |
| 85 | | | | | | | + | + | + | |
| 90 | | | | | + | + | + | + | + | + |
| 90/90 | | | | | | | + | + | + | |
| 100 | | | | | + | + | + | + | + | + |
| 100/100 | | | | | | | + | + | + | |
| 110 | | | | | | + | + | + | + | + |
| 120 | | | | | | + | + | + | + | + |
| 130 | | | | | | | + | + | + | + |
| 140 | | | | | | | + | + | + | + |
| 150 | | | | | | | + | + | + | + |
| 160 | | | | | | | + | + | + | + |
| 170 | | | | | | | + | + | + | + |
| 180 | | | | | | | + | + | + | + |
| 200 | | | | | | | + | + | + | + |
| 210 | | | | | | | | + | + | + |
| 220 | | | | | | | + | + | + | + |
| 230 | | | | | | | | + | + | + |
| 240 | | | | | | | | + | + | + |
| 250 | | | | | | | | | + | |
| 260 | | | | | | | | + | + | + |
| 270 | | | | | | | | | | + |
| 280 | | | | | | | | + | + | |
| 300 | | | | | | | | + | + | |
| sztuk w opakowaniu | 500 | 500 | 500 | 1000 | 1000 | 500 | 500 | 500 | 100 | 50 |
| | | | | od 35 | od 20 | od 25 | od 14 | od 14 | od 50 | od 75 |
| | | | | 500 | 500 | 200 | 200 | 200 | 50 | 25 |
| | | | | od 50 | od 35 | od 80 | od 45 | od 25 | od 170 | |
| | | | | 200 | 200 | 100 | 100 | 100 | 25 | |
| | | | | | od 60 | | | od 100 | | |
| | | | | | 100 | | | 50 | | |
| | | | | | | | | od 170 | | |
| | | | | | | | | 25 | | |
| b | 15 | 16 | 17 | 18 | 20 | 22 | 24 | 28 | 32 | 36 |
| t _{min} | 0,7 | 1 | 1,1 | 1,3 | 2 | 2,5 | 3 | 4 | 5 | 6 |
| s | 1,5 | 1,5 | 2 | 2,5 | 3 | 4 | 5 | 6 | 8 | 10 |
| k _{max} | 1,6 | 2 | 2,5 | 3 | 4 | 5 | 6 | 8 | 10 | 12 |
| dk | 3 | 3,8 | 4,5 | 5,5 | 7 | 8,5 | 10 | 13 | 16 | 18 |

Śruby z łbem walcowym z gniazdem sześciokątnym

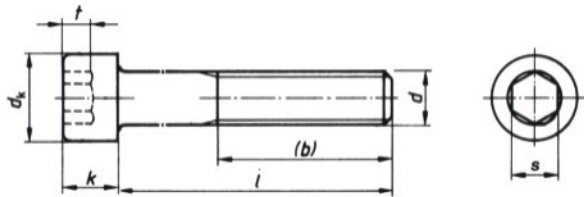

Hexagon socket head cap screws
 Zylinderschrauben mit Innensechskant
 ISO 4762
 PN/M 82302

| d | M 14 | M 16 | M 18 | M 20 | M 22 | M 24 | M 27 | M 30 |
|--------------------|--------|------|------|------|--------|------|------|------|
| <i>l</i> w mm | | | | | | | | |
| 20 | + | + | | | | | | |
| 25 | + | + | | | | | | |
| 30 | + | + | + | + | | | | |
| 35 | + | + | + | + | | | | |
| 40 | + | + | + | + | + | + | | |
| 45 | + | + | + | + | + | + | | |
| 50 | + | + | + | + | + | + | + | + |
| 55 | + | + | + | + | + | + | | |
| 60 | + | + | + | + | + | + | + | + |
| 65 | + | + | + | + | + | + | | |
| 70 | + | + | + | + | + | + | + | + |
| 75 | + | + | + | + | + | + | | |
| 80 | + | + | + | + | + | + | + | + |
| 90 | + | + | + | + | + | + | + | + |
| 100 | + | + | + | + | + | + | + | + |
| 110 | + | + | + | + | + | + | + | + |
| 120 | + | + | + | + | + | + | + | + |
| 130 | + | + | + | + | + | + | + | + |
| 140 | + | + | + | + | + | + | + | + |
| 150 | + | + | + | + | + | + | + | + |
| 160 | | + | | + | + | + | | + |
| 170 | | + | | + | | + | | + |
| 180 | | + | | + | + | + | | + |
| 190 | | + | | + | | + | | + |
| 200 | | + | | + | + | + | | + |
| 220 | | | | | | | | + |
| 240 | | | | | | | | + |
| 260 | | | | | | | | + |
| 280 | | | | | | | | + |
| 300 | | | | | | | | + |
| 320 | | | | | | | | + |
| sztuk w opakowaniu | 50 | 25 | 25 | 25 | 25 | 10 | 10 | 10 |
| | od 110 | | | | od 150 | | | |
| | 25 | | | | 10 | | | |
| b | 40 | 44 | 48 | 52 | 56 | 60 | 66 | 72 |
| t _{min} | 7 | 8 | 9 | 10 | 11 | 12 | 13,5 | 15,5 |
| s | 12 | 14 | 14 | 17 | 17 | 19 | 19 | 22 |
| k _{max} | 14 | 16 | 18 | 20 | 22 | 24 | 27 | 30 |
| d _k | 21 | 24 | 27 | 30 | 33 | 36 | 40 | 45 |

oferta firmy dotyczy pól oznaczonych "+"