


Blachowkręty z łbem stożkowym z gniazdem krzyżowym

Cross recessed countersunk head tapping screws
 Senk-Blechschauben mit Kreuzschlitz (Form C)
 ISO 7050
 PN/M 83114

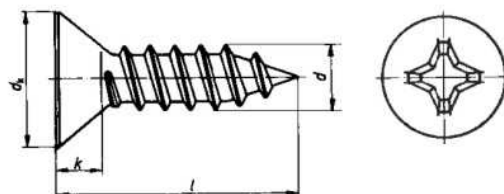

d	2,2 No. 2	2,9 No. 4	3,5 No. 6	3,9 No. 7	4,2 No. 8	4,8 No. 10	5,5 No. 12	6,3 No. 14
<i>l</i> w mm (calach)								
6,5 (1/4")	+	+	+	+				
9,5 (3/8")	+	+	+	+	+	+		
13 (1/2")	+	+	+	+	+	+	+	+
16 (5/8")	+	+	+	+	+	+	+	+
19 (3/4")	+	+	+	+	+	+	+	+
22 (7/8")	+	+	+	+	+	+	+	+
25 (1")	+	+	+	+	+	+	+	+
32 (1 1/4")		+	+	+	+	+	+	+
38 (1 1/2")			+	+	+	+	+	+
45 (1 1/4")			+	+	+	+	+	+
50 (2")			+	+	+	+	+	+
60 (2 3/8")			+	+	+	+	+	+
70 (2 3/4")			+	+	+	+	+	+
80 (3 3/8")					+	+	+	+
90 (3 1/2")						+	+	+
100 (4")						+	+	+
120 (4 1/2")						+	+	
sztuk w opakowaniu	1000	1000	1000	1000	1000	1000	1000	500
			od 45	od 38	od 32	od 25	od 25	od 25
			500	500	500	500	500	200
					od 50	od 45	od 45	
					200	200	200	
k~	1,3	1,7	2,1	2,3	2,5	3	3,4	3,8
d _{k max}	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4

oferta firmy dotyczy pól oznaczonych "+"