


Śruby z łbem walcowym niskim

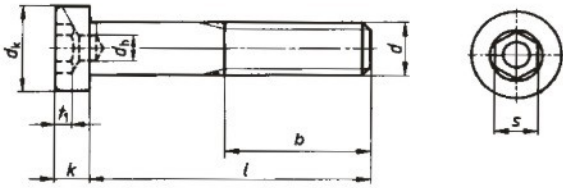

Socketed head cap screws, low head, pilot recess
 Zylinderschrauben mit Innensechskant


d	M 3 *	M 4	M 5	M 6	M 8	M 10	M 12
<i>l</i> w mm							
6	+	+					
8	+	+	+	+			
10	+	+	+	+	+		
12	+	+	+	+	+		
16	+	+	+	+	+	+	
20	+	+	+	+	+	+	+
25	+	+	+	+	+	+	+
30	+	+	+	+	+	+	+
35		+	+	+	+	+	+
40		+	+	+	+	+	+
45			+	+	+	+	+
50			+	+	+	+	+
55				+	+	+	+
60			+	+	+	+	+
65				+	+	+	+
70				+	+	+	+
80				+	+	+	+
90					+	+	+
100					+	+	+
							+
sztuk w opakowaniu	1000	1000	500	500	500	100	50
		od 20	od 25	od 16	od 20	od 50	od 80
		500	200	200	200	50	25
		od 35		od 45	od 30		
		200		100	100		
b	12	14	16	18	22	26	30
d _{h min}	-	2	2,5	3	4	5	6
t _{1 min}	1,5	1,48	1,88	2	2,88	3,35	3,85
s	2	3	4	5	6	8	10
k _{max}	2	2,8	3,5	4	5	6,5	7,5
d _{k max}	5,5	7	8,5	10	13	16	18

*M 3 z przyczyn technicznych dostarczamy tylko w/g DIN 7984

oferta firmy dotyczy pól oznaczonych "+"

Śruby z łbem walcowym niskim

Socketed head cap screws, low head, pilot recess
 Zylinderschrauben mit Innensechskant

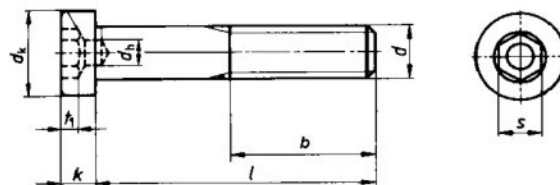

d	M 14	M 16	M 18	M 20	M 24
l w mm					
25	+	+			
30	+	+			
35	+	+	+	+	
40	+	+	+	+	
45	+	+	+	+	
50	+	+	+	+	+
55	+	+	+	+	+
60	+	+	+	+	+
65	+	+	+	+	+
70	+	+	+	+	+
80	+	+	+	+	+
90	+	+	+	+	+
100	+	+	+	+	+
110	+	+	+	+	+
120	+	+	+	+	+
130	+	+	+	+	+
140	+	+	+	+	+
150	+	+	+	+	+
sztuk w opakowaniu	50	25	25	25	10
	od 110				
	25				
b	34	38	42	46	54
d _{h min}	7	8	8	10	12
t _{1 min}	4,35	5,35	5,85	6,32	7,18
s	12	14	14	17	19
k _{max}	8,5	10	11	12	14
d _{k max}	20,67	23,67	27	30	36

oferta firmy dotyczy pól oznaczonych "+"