


## Blachowkręty z łbem walcowym wypukłym z gniazdem krzyżowym

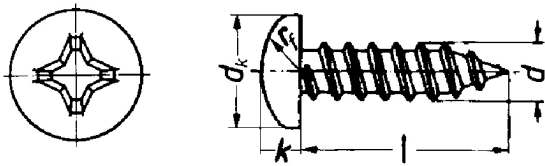

Cross recessed pan head tapping screws  
 Linsen-Blechschauben ( Form C)  
 ISO 7049  
 PN/M 83116

d	2,2 No. 2	2,9 No. 4	3,5 No. 6	3,9 No. 7	4,2 No. 8	4,8 No. 10	5,5 No. 12	6,3 No. 14
<i>l</i> w mm (calach)								
6,5 (1/4")	+	+	+	+				
9,5 (3/8")	+	+	+	+	+	+		
13 (1/2")	+	+	+	+	+	+	+	+
16 (5/8")	+	+	+	+	+	+	+	+
19 (3/4")	+	+	+	+	+	+	+	+
22 (7/8")	+	+	+	+	+	+	+	+
25 (1")	+	+	+	+	+	+	+	+
32 (1 1/4")		+	+	+	+	+	+	+
38 (1 1/2")			+	+	+	+	+	+
45 (1 3/4")			+	+	+	+	+	+
50 (2")			+	+	+	+	+	+
60 (2 3/8")			+	+	+	+	+	+
70 (2 3/4")			+	+	+	+	+	+
80 (3 3/8")					+	+	+	+
90 (3 1/2")						+	+	+
100 (4")						+	+	+
120 (4 1/2")						+	+	
sztuk w opakowaniu	1000	1000	1000	1000	1000	1000	500	500
<i>l</i> >= od					45	45	45	45
					500	500	200	200
<i>r<sub>f</sub></i> =	3,4	4,4	5,4	5,8	6,2	7,2	8,2	9,5
<i>k</i> max	1,8	2,2	2,6	2,8	3,05	3,55	3,95	4,55
<i>d<sub>k</sub></i> max	4,2	5,6	6,9	7,5	8,2	9,5	10,8	12,5

oferta firmy dotyczy pól oznaczonych "+"